B 66 C

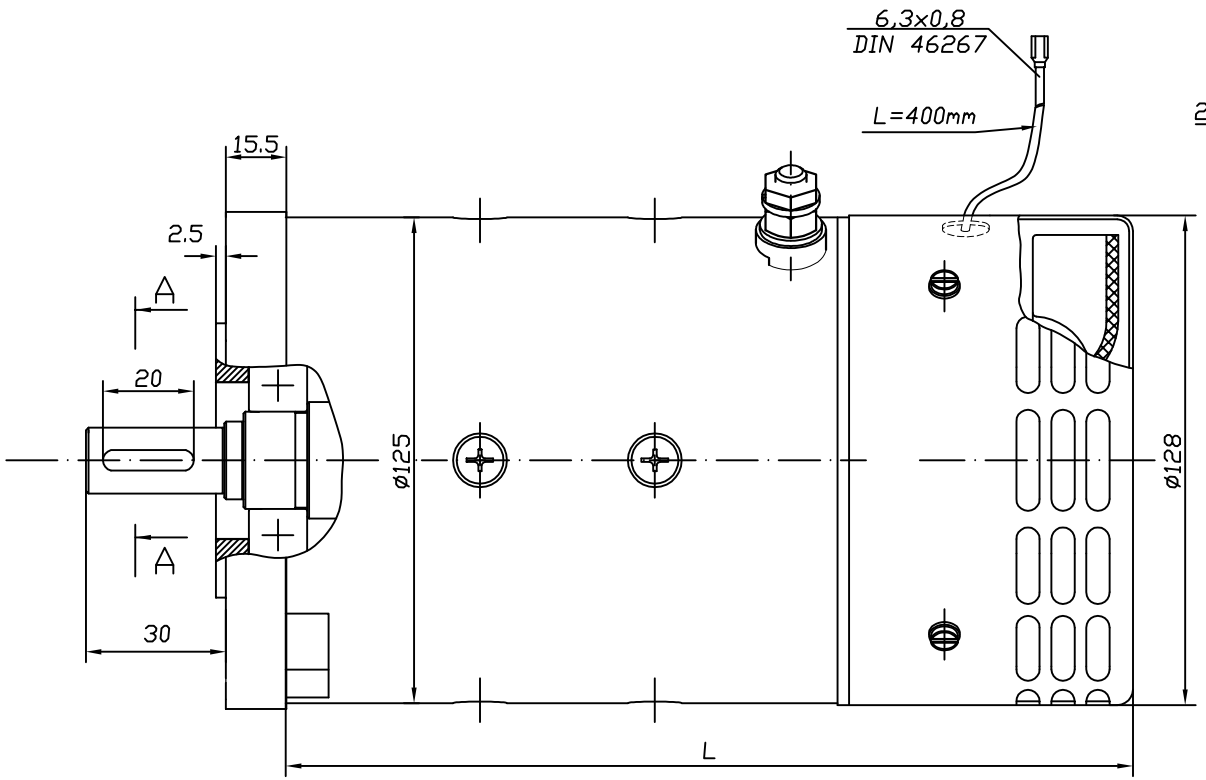

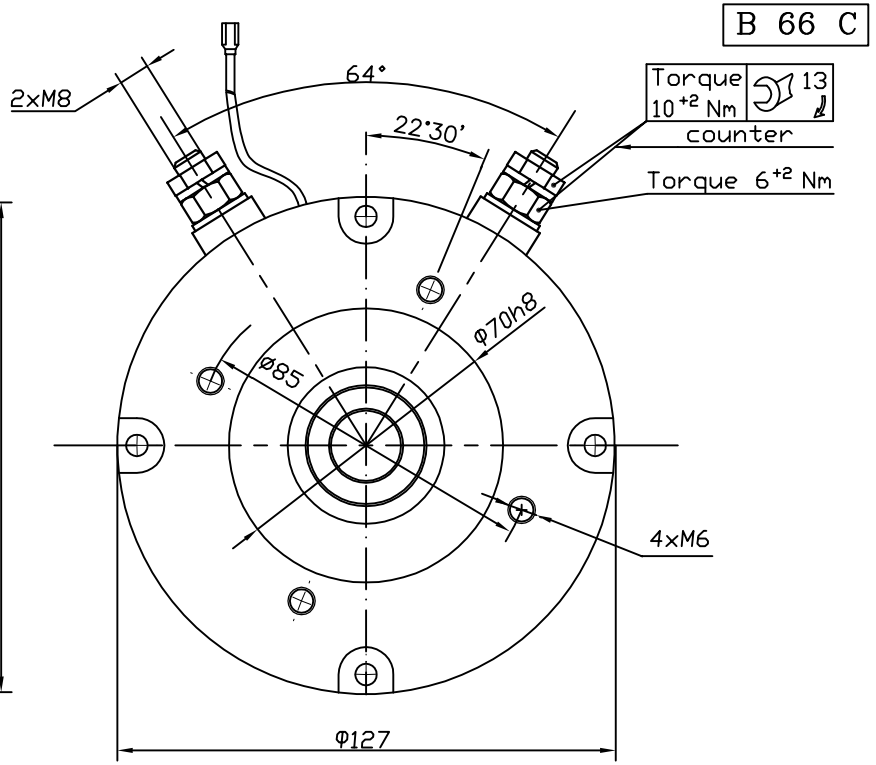

A - A



Flange B14/71A shaft-14

ECH 1/7,2/19-02
0 19 41 9020

rated power	1 kW
rated voltage	72 V
rated current	19 A
rated speed	1900 min^{-1}
operation mode	S1
excitation	chunt
protection	IP 21
insulation	F
weight	10.83 kg
length L	224
char. curve	H72B02
rotation	C.W.D.E
conn. diag.	fig. 1

DC motor ECH 1/7,2/19-02
IP 21 excitation chunt
insulation class F min^{-1} 1900
kW 1 V 72 A 19
kg date
duty cycle S1
www.elprom-ems.com

EC 3/7,2/27
0 31 42 7000

	3 kW
	72 V
	67 A
	2700 min^{-1}
	S2-3min
	compound
	IP 21
	F
	224
	C.W.D.E
	fig. 2

DC motor EC 3/7,2/27
IP 21 excitation compound
insulation class F min^{-1} 2700
kW 3 V 72 A 76
kg date
duty cycle S2-3
www.elprom-ems.com

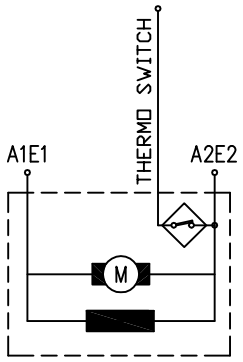

fig. 1

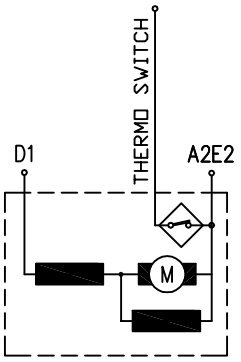

fig. 2

Rev.	
15.05.2008	
15.04.2008	
04.03.2008	
16.01.2008	
01.11.2007	

Elprom–EMS