


G 01A5

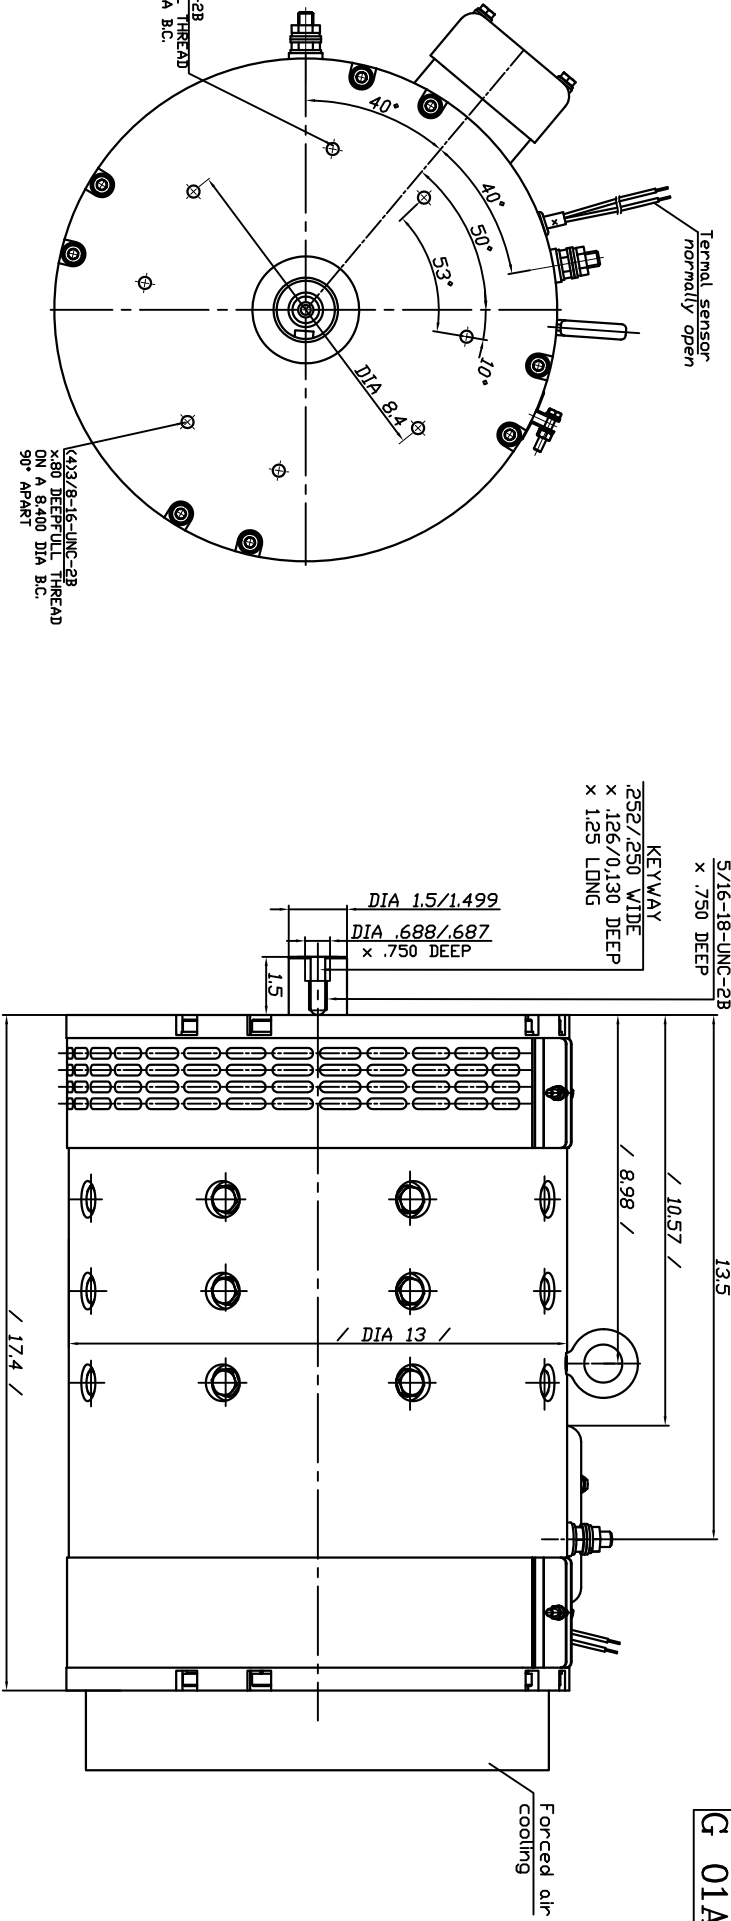


5/16-18-UNC-2B
x .750 DEEP
KEYWAY
.252/.250 WIDE
x .126/0.130 DEEP
x 1.25 LONG

DIA 1.5/1.499
DIA .688/.687
x .750 DEEP

(43/8-16-UNC-2B
x .80 DEEP FULL THREAD
ON A 8.400 DIA B.C.
90° APART

(43/8-16-UNC-2B
x .80 DEEP FULL THREAD
ON A 8.400 DIA B.C.
90° APART

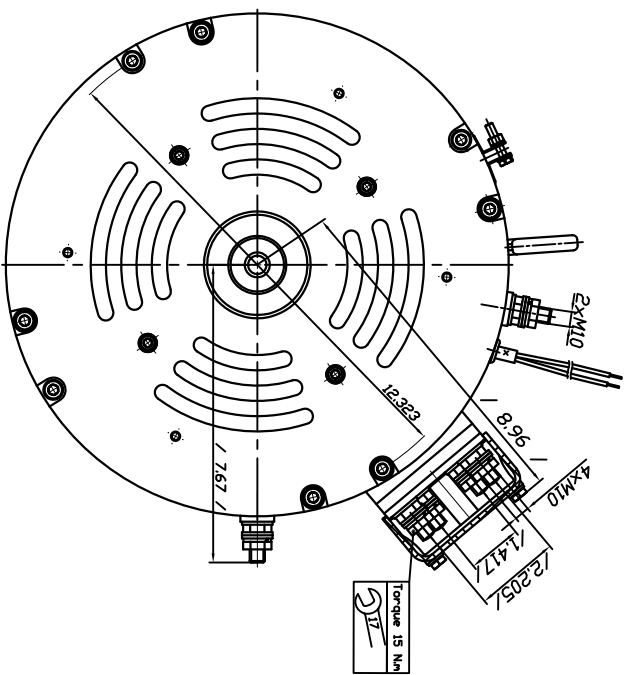


KOSTOV 13"

Duty cycle	Volts	Amps	RPM	kW	HP	Peak HP	Torque
S2-60min	185	315	3400	50	66.7	205	140
S2-60min	212	315	3900	57	76	235	140
S2-60min	240	315	4450	65	86.7	270	140

rated power
rated voltage
rated current
rated speed
operation mode
excitation
protection
insulation
interpoles
weight
length L
char. curve
rotation

S2-60min
Series
IP 21
H
YES
rev

Rotation (viewed from drive end)
CCW; Connect D2 to A2;
CW; Connect D1 to A2;
*** to D2 and "-" to B1



KOSTOV 13"
excit. SERIES
IP 21 insulation H1
rpm kW A V duty S2-60 min
rpm kg S.N.
www.kostov-motors.com

KOSTOV MOTORS Balkancar
"G. Kostov" JSC
19.10.2011
05.07.2011
01.03.2011
Rev.