




EC 0,8/1,2/30-14.1 EC 0,8/2,4/30-14.1  
 0 18 03 0141 0 18 13 0141

rated power 0,8 kW  
 rated voltage 12 V  
 rated current 110 A  
 rated speed 3000 min<sup>-1</sup>  
 operation mode S2-1min  
 excitation mode Compound  
 protection IP 44  
 insulation F  
 length L 3,34 kg  
 char. curve C12D01  
 rotation C.W/D.E.

0,8 kW  
 24 V  
 58 A  
 3000 min<sup>-1</sup>  
 S2-1,5min  
 Compound  
 IP 44  
 F  
 3,34 kg  
 C24D01  
 C.W/D.E.

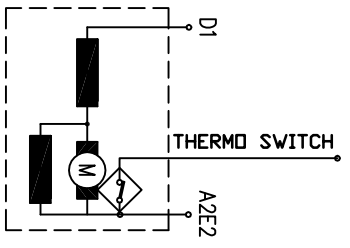


 DC motor EC 0,8/1,2/30-14  
 kW 0,8 V 12 rpm 3000  
 SE-1min  
 www.eiprom-ems.com


 DC motor EC 0,8/2,4/30-14  
 kW 0,8 V 24 rpm 3000  
 SE-1,5min  
 www.eiprom-ems.com


 EIProm-EMS  
 19.09.2007  
 28.06.2007  
 Rev.

NOTE: The front side bearing fixing is ensured after the mounting of the pump. The other bearing is free.