


ET 22/14,4/40-02    ETH 22/14,4/40-06  
 0 53 74 0020    0 53 74 0060

rated power	22 kW	22 kW
rated voltage	144 V	144 V
rated current	192 A	
rated speed	4000 min <sup>-1</sup>	4000 min <sup>-1</sup>
operation mode	S2-60min	S2-60min
excitation	IP 21	Independent
protection	F	IP 21
insulation	81 kg	
weight		
length L		
char. curve	S144F01	
rotation	REV	REV
conn. diagram	fig. 1	fig. 2

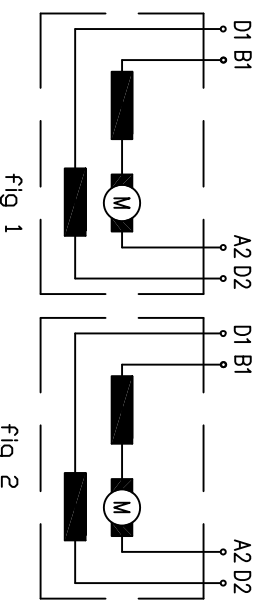

DC motor    excitation    insulation class    IP    Ipr    Ipr  
 kW    W    AL    0    0    0  
 rpm    duty    kg    0    0    0  
 www.eiprom-ems.com    CE

21.11.2006	
29.10.2004	
25.11.1998	
27.10.1997	
12.03.1997	
Rev.	

Rotation (viewed from drive end)  
 CCW: Connect D2 to A2j, "+" to D1 and "-" to B1  
 CW: Connect D1 to A2j, "+" to D2 and "-" to B1