


EC 0,8/1,2/30-14.1 EC 0,8/2,4/30-14.1
 0 18 03 0141 0 18 13 0141

rated power 0,8 kW
 rated voltage 12 V
 rated current 110 A
 rated speed 3000 min⁻¹
 operation mode S2-1min
 excitation mode Compound
 protection IP 44
 insulation F
 length L 3,34 kg
 char. curve C12D01
 rotation C.W./D.E.

0,8 kW
 24 V
 58 A
 3000 min⁻¹
 S2-1,5min
 Compound
 IP 44
 F
 3,34 kg
 C24D01
 C.W./D.E.

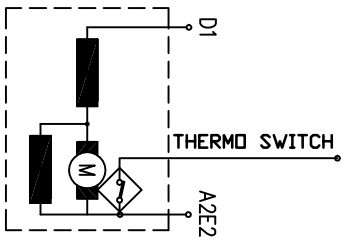

DC motor EC 0,8/1,2/30-14
 kW 0,8 V 12 rpm 3000
 S2-1min
 www.elprom-ems.com

DC motor EC 0,8/2,4/30-14
 kW 0,8 V 24 rpm 3000
 S2-1,5min
 www.elprom-ems.com

Elprom-EMS
 19.09.2007
 28.06.2007
 Rev.

NOTE: The front side bearing fixing is ensured after the mounting of the pump. The other bearing is free.