

rated power
rated voltage
rated current
rated speed
operation mode
excitation
protection
insulation
weight
length L
char. curve
rotation
conn. diag.

ET 15/12/42 ET 12/14,4/50 ET 12/7,2/50-04 ETH 15/12/42-01
0 49 64 2000 0 46 75 0000 0 46 55 0040 0 49 64 2010

15 Kw
120 V
170 A
4200 min⁻¹
S2-30min
series
IP 21
F
46,9 kg

12 Kw
144 V
107 A
5000 min⁻¹
S2-60min
series
IP 21
F
48 kg

12 Kw
72 V
225 A
5000 min⁻¹
S2-60min
series
IP 21
F
48 kg

15Kw
120 V
154 A
4200 min⁻¹
S2-30min
Independent
IP 21
F
45,2 kg

S120E02
fig. 1

S144E01
fig. 1

S72E01
fig. 1

N120E01
fig. 2



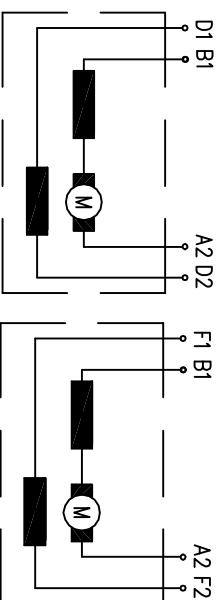


fig. 1

fig. 2



	excit.	<input type="checkbox"/>
kw	v	insulation
ip	a	idly
kg	v	sn
www.kostov.com	0101018100m	

25.03.2008		Balkanacar "G. Kostov" JSC
20.11.2006		
14.12.2004		
17.12.1998		
27.05.1998		
06.03.1997	Rev.	